

Expansionskärl serie ERP

För slutna värmesystem. Tillverkade i epoxylackat stål.

Arbetstemperatur -10°C – $+110^{\circ}\text{C}$.

Enligt Standard 97/23/CE (PED). Max arbetstryck 3 bar. Förtryck 1 bar.

Benämning	Art.nr.	H Max	Ansl.	Mått	Volym
ERP 320/10	380153	3 bar	20	H:131 mm, D:320 mm	10 L
ERP 320/12	380155	3 bar	20	H:165 mm, D:320 mm	12 L
ERP 320/6	380151	3 bar	20	H:94 mm, D:320 mm	6 L
ERP 320/8	380150	3 bar	20	H:121 mm, D:320 mm	8 L
ERP 385/10	380158	3 bar	20	H:108 mm, D:385 mm	10 L
ERP 385/12	380159	3 bar	20	H:139 mm, D:385 mm	12 L
ERP 385/14	380160	3 bar	20	H:146 mm, D:385 mm	14 L
ERP 385/8	380157	3 bar	20	H:98 mm, D:385 mm	8 L
ERP 416/10	380161	3 bar	20	H:75 mm, D:416 mm	10 L
ERP RET 06	380162	3 bar	20	L:516 x B:196 x H:95 mm	6 L
ERP RET 08	380163	3 bar	20	L:516 x B:196 x H:110 mm	8 L
ERP RET 10	380164	3 bar	20	L:516 x B:196 x H:124 mm	10 L
ERP RET 12	380165	3 bar	20	L:516 x B:196 x H:152 mm	12 L




ERP 320, 416



ERP 385



ERP RET

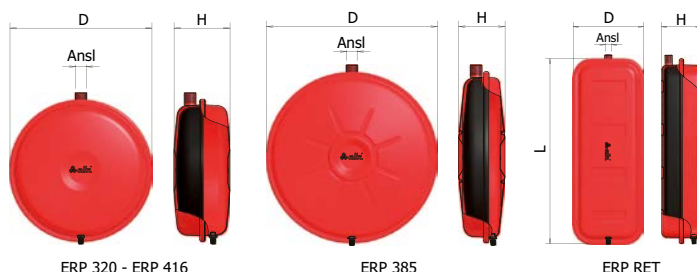

ERP 320 - ERP 416

ERP 385

ERP RET

